
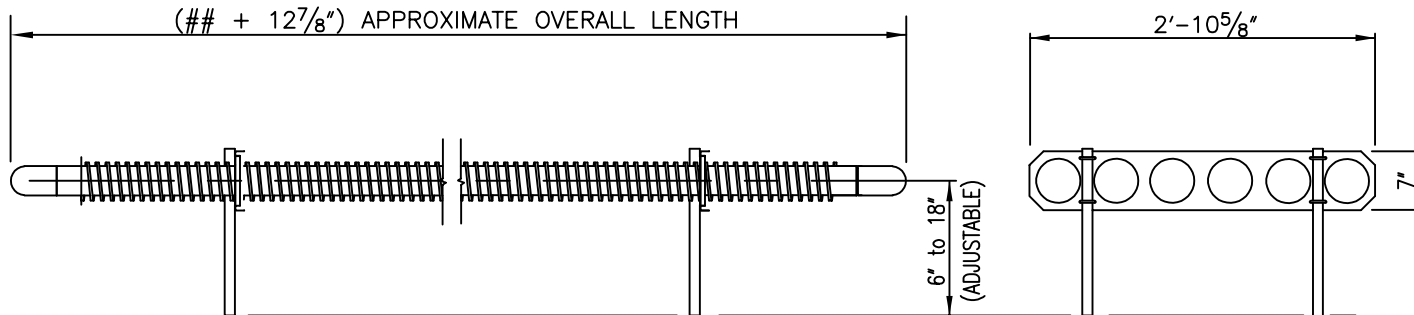


Standard Model	Surface Area	Displacement	Weight (Dry)	Overall Length
HEL-6-12.5S	374 ft ²	3.10 ft ³	690 lbs.	13'-6 ⁵ / ₈ "
HEL-6-25S	748 ft ²	6.00 ft ³	1295 lbs.	26'-1 ¹ / ₈ "

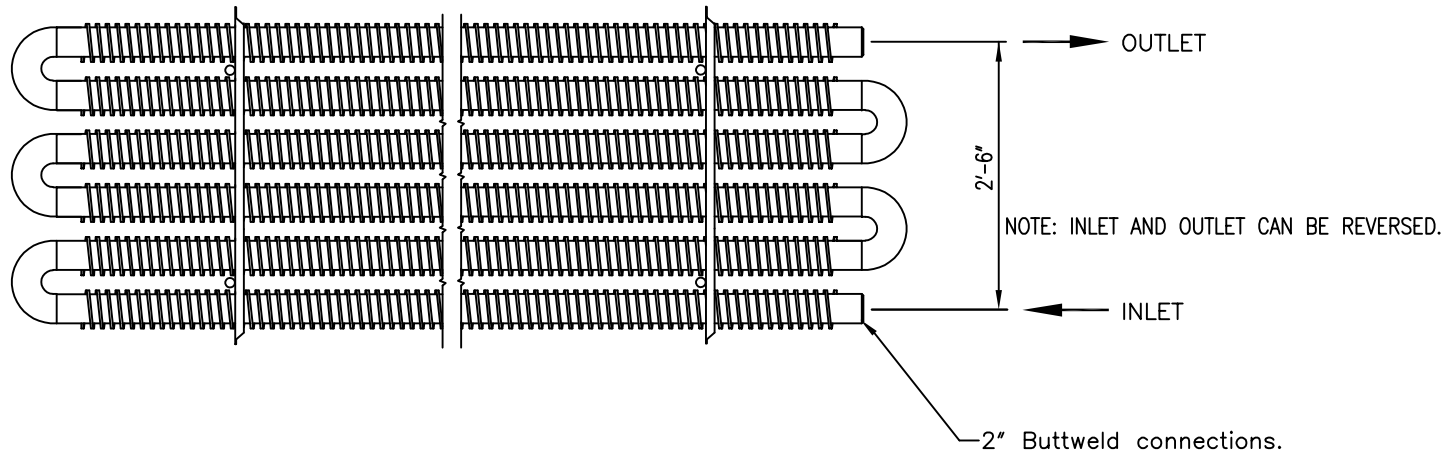

NOTES

TANK HEATER WILL FIT THROUGH MANWAY WITH MINIMUM INSIDE DIAMETER OF 35\".

COAT BUTT WELD SURFACES WITH DEOXY ALUMINATE AND PROTECT WITH PLASTIC PIPE CAPS PRIOR TO SHIPMENT.

DESIGN CONDITIONS WILL BE PER DATASHEET.

SUPPORTS CAN BE MODIFIED TO MEET SPECIAL CONDITIONS.

TANK HEATER IS DESIGNED PER ASME BPVC SECTION VIII DIVISION I. UNIT MAY BE CODE STAMPED IF REQUIRED.

DESIGN CONDITIONS (KHT Standard Designs)

Design Pressure	650 PSIG
Hydro Test Pressure (Shop)	845 PSIG
Metal Temp.	-20/650 °F
Corrosion Allowance:	1\16\" (except fins)

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY AND CONFIDENTIAL AND SHALL NOT BE PROVIDED TO OR DISCUSSED WITH OTHERS WITHOUT THE EXPRESS WRITTEN APPROVAL OF KOCH HEAT TRANSFER COMPANY, LP AND/OR ITS AFIILIATES.